

EnStation2

N300 2.4GHz Long Range Point to Point CPE

- 2.4 GHz
- 11b/g/n
- 300Mbps



Key Features

- IEEE 802.11 b/g/n compliant
- Up to 300Mbps (2.4GHz)
- 13dBi Directional high gain antenna
- 24V Proprietary PoE support
- Waterproof Housing IP55 rated
- AP/CB/CR/WDS Mode support
- 4 SSIDs support per radio + VLAN tagged supported
- Web Configuration and EZ controller software
- SNMP V1/ V2c/V3, MIB I/II supported
- WEP/WPA/WPA2 wireless encryption
- IPV4/IPV6 support
- Narrow Bandwidth Support

EnGenius Outdoor CPE design High Power, High Sensitivity and Strong Reliability Solutions under Harsh Environment.

EnStation2 engineered with the powerful independent RF interface that offers bandwidth up to 300Mbps on 2.4GHz band for accommodating heavy traffic services. The high-efficient 13dBi directional with polarization antenna provides an optimal, extended real outdoor throughput performance via point to point transmission.

EnStation2 Data sheet 220914

*Theoretical wireless signal rate based on IEEE standard of 802.11 b, g, n chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice

BUSINESS CLASS

EnStation2

Learn more about EnGenius Solutions at www.engeniustech.com.sg


Multiple Operation Modes

EnStation2 can operate into four different modes with **Access Point**, **Client Bridge**, **Client Router** and **WDS Mode**. With powerful solution and individual interfaces, EnStation2 can connect with the multiple devices and extend the wireless signal easily.

Effective Management

EnStation2 integrated with Network Management Software "EZ controller" can offer variety uses in constructing scalable wireless network of all possible application and also allow centralized management via user-interface. EnGenius has developed the multiple functions for maximum security, monitoring and easily management to ensure the optimal users' experience. EnStation2 provides wide-range of authentication and encryption standards (including WEP, WPA, WPA2, TKIP/AES and IEEE 802.1X) to enforce the maximum security.

Indicator and Physical Interface

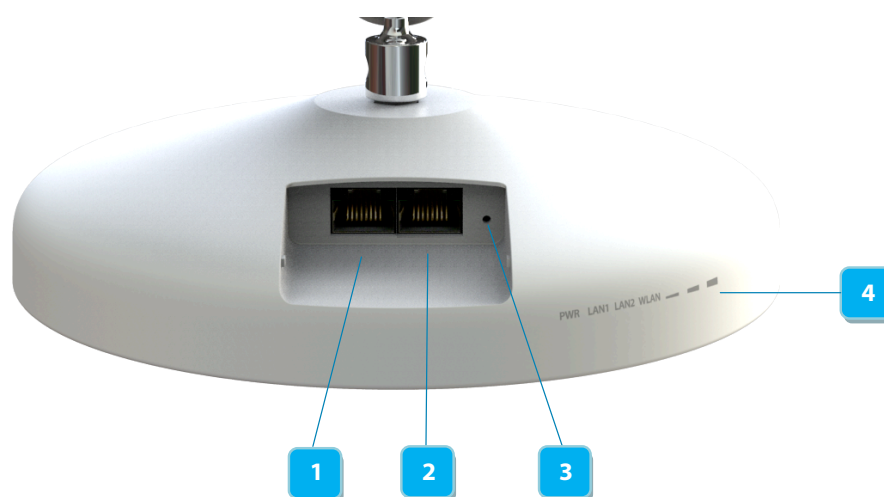

Physical Interface		Indicator	
1	10/100 LAN (PoE)	4	LED Signal
2	10/100 LAN		
3	Reset Button		

SPECIFICATION
Wireless Radio Specification
2.4GHz 802.11b/g/n <ul style="list-style-type: none"> - Max 300Mbps
Transmit Power (Maximum Value) <ul style="list-style-type: none"> - 2.4GHz: Max 15dBm - Maximum power is limited by regulatory power
Supported radio technologies: <ul style="list-style-type: none"> - 802.11b: Direct-sequence spread-spectrum(DSSS) - 802.11n: Orthogonal frequency-division multiplexing (OFDM) - 802.11n with 5/10/20/40 MHz channel width - 802.11b/g with 5/10/20 MHz channel width
Supported modulation types: <ul style="list-style-type: none"> - 802.11b: BPSK, QPSK, CCK - 802.11n: BPSK, QPSK, 16-QAM, 64-QAM
Supported data rates (Mbps): <ul style="list-style-type: none"> - 802.11b: 1, 2, 5.5, 11 - 802.11g: 6, 9, 12, 18, 36, 48, 54 - 802.11n: 6.5 to 300 (MCS0 to MCS15)
Power
Power Source: <ul style="list-style-type: none"> - 24V proprietary compliant source - Active Ethernet (Power over Ethernet, PoE)
Power Consumption: <ul style="list-style-type: none"> - Maximum 7.2W
Antennas
Internal high gain directional antennas <ul style="list-style-type: none"> - 13dBi 2.4GHz antenna
Directional type <ul style="list-style-type: none"> - Point to point transmission in the long range distance
Interface
Two 10/100 BASE-T Ethernet Ports <ul style="list-style-type: none"> - One port supports 24V proprietary PoE input - One port supports the extension of internet signal

One Reset Button
Mechanical & Environment
Dimensions / Weight <ul style="list-style-type: none"> - 190mm (D) x 38mm (H) - 460g - Unit, without mounting kit
Operating <ul style="list-style-type: none"> - Temperature: -20°C~60°C - Humidity: 0%~90% typical
Storage <ul style="list-style-type: none"> - Temperature: -30°C~80°C
Harsh Environment Use <ul style="list-style-type: none"> - IP55 rated
Operation Mode
Access Point / Client Bridge / Client Router / WDS: <ul style="list-style-type: none"> - A variety of operation modes to serve multiple constituencies and applications.
Easy Management
Auto Channel Selection <ul style="list-style-type: none"> - Setting varies by Regulatory Domains
SSIDs <ul style="list-style-type: none"> - BSSID support - 4 SSIDs support
VLAN Tag <ul style="list-style-type: none"> - Independent VLAN setting can be enable or disable - Any packet that enters the Device without a VLAN tag will have a VLAN tag inserted with a PVID (Ethernet Port VID)
VLAN Pass-through <ul style="list-style-type: none"> - VLAN pass through over WDS bridge
SNMP & MIB <ul style="list-style-type: none"> - v1/v2c/v3 support - MIB I/II, Private MIB
Clients Traffic Status <ul style="list-style-type: none"> - Reports the various main information timely which is required by administrator
QoS <ul style="list-style-type: none"> - Complaint on IEEE 802.11e standard

RADIUS Accounting

- Help operators to offload 3G to the Wi-Fi seamlessly

Effective Control and Use

CLI Comments Support

- Setting varies by Regulatory Domains

Distance Control (Ack Timeout)

Multicast Supported

Wi-Fi Scheduler

- Set the schedule for rebooting the device

Reinforcement Security

WEP Encryption-64/128/152 bit

WPA/WPA2 Enterprise (WPA-EAP using TKIP or AES)

Hide SSID in beacons

MAC address filtering

- Filter up to 50 MACs

Wireless STA (Client) connection list

- Reports the various main information timely which is required by administrator

RF Specification (Aggregated Value)


Channel	Data Rate	Transmit Power (Aggregated, dBm)	Receive Sensitivity (Aggregated, dBm)
802.11b 2.4 GHz	1 Mbps	15.0	-95.0
	2 Mbps	15.0	-95.0
	5.5 Mbps	15.0	-93.0
	11 Mbps	15.0	-93.0
802.11g 2.4 GHz	6 Mbps	15.0	-95.0
	54 Mbps	13.0	-75.0
802.11n HT20 2.4 GHz	MCS 0 / 8 / 16	15.0	-95.0
	MCS 7 / 15 / 23	13.0	-73.0
802.11n HT40 2.4 GHz	MCS 0 / 8 / 16	15.0	-95.0
	MCS 7 / 15 / 23	13.0	-73.0

*Maximum performance of the hardware provided. Maximum transmit power is limited by local regulatory.
*The supported frequency band is restricted by local regulatory requirements.
*Transmit power is configured in 1.0dBm increments


Antenna Specifications (Internal Antenna)

	2.4GHz (Port1)	2.4GHz (Port2)
Peak Antenna Gain	13dBi	13dBi
Polarization	Linear	Linear
Horizontal Beam-Width	67°	61°
Elevation Beam-Width	33	35
VSWR	1:2.0	1:2.0
Dimension	175 x 175 x 5.5 (mm)	


Radiation Diagram
Port1: E-Plane

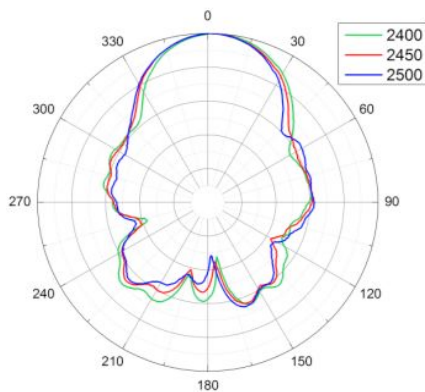


Port1: H-Plane

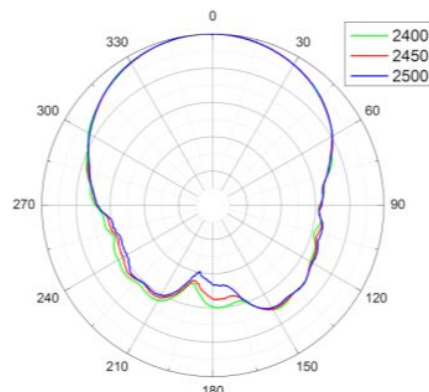

Port2: E-Plane

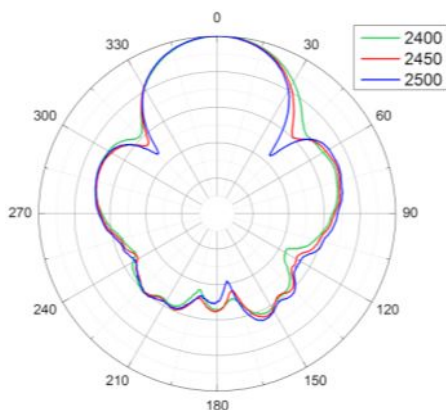

Port2: H-Plane

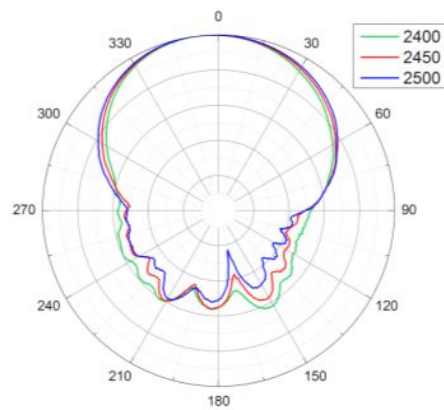

EnStation2 Data sheet 220914

*Theoretical wireless signal rate based on IEEE standard of 802.11 b, g, n chipset used. Actual throughput may vary. Network conditions and environmental factors lower actual throughput rate.

** All specifications are subject to change without notice

BUSINESS CLASS

EnStation2

Network Management System – EnGenius Zone Controller

In enhancing the real-time functionality of a network, applying the best network management software tool is necessary. Built-in Network Management System, EZ Controller (EnGenius Zone Controller), provides an intelligent tool for IT manager, installer, and network administrators to configure control, and manage all wireless devices within network from one central location. This application ensures the entire network will optimally operate without troubles, glitches and interruptions.

The growing demand of performance related results from service providers or someone involved in an enterprise, you need to provide a huge platform to make it successful. The robust design of EZ Controller can manage different devices simultaneously and precisely, as well as configure the advanced service for wireless clients.



Configure, control and manage
EnGenius Enterprise Wireless
Devices from one central location.

Features	
• Easy-to-use User Interface	• Sequential firmware upgrades to deployed APs / Bridges
• Optimize network performance	• Import and archive floorplan maps for radio coverage plotting
• Eliminate downtime	• Labels assets by MAC and IP address or user-defined aliases
• Check real-time wireless coverage	• Export real-time AP statistics report
• Monitor and control each sheet	• Sequential firmware upgrades to deployed APs / Bridges
• Monitor traffic loads by AP, MAC or IP address	

An Intelligent solution for different business environment



Villa



Campus



Office



Plaza