
PRODUCT CARD

WAFA-5409-10S

WALL-MOUNT CABINET ASSEMBLED










SPECIFICATION:

Rack standard				19"
Server cabinet type				Wall-mount, single section
Assembly				Assembled
Material of the frame and other element(s)				High-grade cold-rolled steel (SPCC), powder-coated
Surface finish of the frame and other element(s)				Degreased, pickled, parkerized, powder coated with a matt finish. Protected against oxidation, corrosion, rust
Height				9 [U]
				500 [mm]
Width	Cabinet structure			570 [mm]
	Cabinet structure incl. door lock(s)			580 [mm]
Length	Cabinet structure			450 [mm]
	Cabinet structure incl. door lock(s) and wall-mount rail			456.20 [mm]
Mounting depth	Front rail - rear rail (max. spacing)			261 [mm]
	Front rail - rear cover			351.2 [mm]
Cabinet structure	Max. static load capacity			60 [kg]
	Protection rating (according to EN 60529)			IP20
Dimensions of the structure / elements (Length x Width x Height)	Door	Front		22 x 566 x 412.6 [mm]
		Side		21.5 x 306 x 418 [mm]
	Frame	Front		73 x 570 x 499.6 [mm]
		Side		38.5 x 328 x 497 [mm]
	Rear cover			70 x 570 x 499.6 [mm]
	Mounting rail(s)			30.5 x 20.5 x 468.8 [mm]
	Wall-mount rail			5.4 x 500 x 49.5 [mm]
	Top and bottom panel			357.2 x 532.4 x 12.5 [mm]
Structure and other element(s) thickness	Door	Front	Glass	5 [mm]
			Sheet metal	1 [mm]
		Side		1 [mm]
	Frame	Front		1 [mm]
		Side		1 [mm]
	Rear cover			1 [mm]
	Mounting rail(s)			1.2 [mm]
	Wall-mount rail			1.2 [mm]
	Top and bottom panel			1 [mm]
Vents	Number	Top panel		2 [pcs]
		Bottom panel		2 [pcs]
	Dimensions (Length x Width)	Top panel		120 x 120 [mm]
		Bottom panel		120 x 120 [mm]

EAN-13: 5901969439632
CAT NO.: WAFA-5409-10S


© LANBERG. All rights reserved. LANBERG name and logo, and all related product and service names, design marks and slogans are the trademarks or registered trademarks of LANBERG. All other product and service marks contained here in are the trademarks of their respective owners

PRODUCT CARD

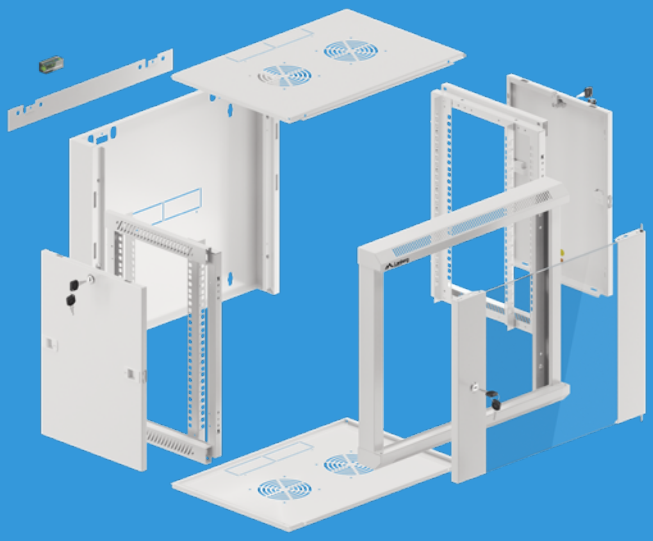





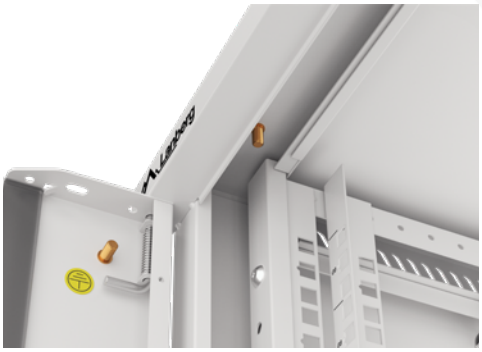

SPECIFICATION:

Cable entry panel(s)	Number	Top panel	1 [pcs]
		Bottom panel	1 [pcs]
		Rear cover	1 [pcs]
	Dimensions (Length x Width)	Top panel	45 x 230 [mm]
		Bottom panel	45 x 230 [mm]
		Rear cover	45 x 230 [mm]
Grounding pin(s)	Number		5 [pcs]
	Diameter		6 [mm]
Slots for anchors on a horizontal wall-mount rail	Number		4 [pcs]
	Diameter		4 – ø 10
Installation of vertical mounting rails on the frames of the cabinet	Number of mounting holes		5 [pcs] (from the front and rear)
	Gap between the mounting holes		20 [mm]
Additional information	Front door		Removable, with a grounding pin. Enable two-sided assembly and rotation up to 180°. Equipped with tempered glass and a fixed lock
	Side door(s)		Removable, with grounding pin, steel, with latches. Equipped with a fixed lock
	Front frame		Equipped with small, rectangular vents and 2 grounding pins
	Side frame(s)		With small, rectangular vents
	Rear cover		Fitted with a system of slots for mounting the wall strip and wall plugs
Compliant with standards	RoHS		IEC 62321-4:2013 + A1:2017; IEC 62321-5:2013; IEC 62321-6:2015; IEC 62321-7-1:2015; IEC 62321-7-2:2017; IEC 62321-8:2017
	RACK		EIA/ECA-310-E; IEC 60297-3-100:2008; IEC 60297-3-101:2004
	Others		GB 15763.2-2005 (similar to EN 12150-1:2000 standard)
Included accessories			• Required Phillips screws for assembling the cabinet, • Flat wall-mount rail, • Portable level with magnet, • 4 mounting rails with „U" height indication, • Front lock and a set of side locks (all factory-fitted in doors with latches), • Set of 3 double identical keys (1 for front door, 2 for side door), • 10 M6*12 Phillips screws including M6 cage nuts.
Logistic details	Packaging	Number	1 [pcs]
		Type	Flatpack
	EAN		5901969422085
Color			Gray (RAL 7035)
Warranty			60 [months]

EAN-13: 5901969439632
CAT NO.: WAFA-5409-10S

© LANBERG. All rights reserved. LANBERG name and logo, and all related product and service names, design marks and slogans are the trademarks or registered trademarks of LANBERG. All other product and service marks contained here in are the trademarks of their respective owners